

450CT

**COMPACT TRACK LOADER
TIER II CERTIFIED**

ENGINE

Model	Case Family III 445T/M2 diesel, Tier II certified	
Type	4-stroke, turbocharged	
Cylinders	4	
Bore/Stroke	4.1 in x 5.2 in (104 x 132 mm)	
Displacement	274 in ³ (4.5 L)	
Fuel injection	Direct	
Fuel	#2 Diesel	
Fuel filter	In-line strainer	
Air intake	Cross-flow	
Cooling	Liquid	
Engine speeds (rpm)		
High idle - no load	2480±50	
Rated - full load	2300	
Low idle	1050±50	
Horsepower per SAE J1349		
Gross	88 (65.7 kW) @ 2300 rpm	
Net	82 (61.2 kW) @ 2300 rpm	
Peak torque		
@ 1400 rpm	263 lb-ft (356 N·m)	

ENGINE COOLING

Radiator		
Core type	Square wave serpentine	
Core size area	449 in ² (.29 m ²)	
Rows of tubes	5	
Cap pressure	13 psi (89.6 kPa)	
Fan		
Diameter	18.9 in (480 mm)	
Ratio	1.1:1	
Water pump		
Style	Integral	
Flow	48 gpm (182 L/min)	
Engine lubrication		
Pump	Deep sump with plate cooler and pressurized under-piston nozzles	
Pump operating angle ratings		
Side-to-side	Rated 35°	
Fore and aft	Rated 35°	
Oil filtration	Replaceable, full-flow cartridge	

POWERTRAIN

Drive pump	Tandem, axial piston hydrostatic transmission with integral charge pump driven directly off engine flywheel	
Pump to engine ratio	1.2:1	
Displacement	0 to 2.81 in ³ (46 cc)	
Pump flow @ rated rpm	33.6 gpm (127 L/min)	
Flow	Bi-directional	
Charge pressure	360 psi (24 bar)	
System relief	5000 psi (345 bar)	
Controls	Servo	
Drive motors	Fixed displacement radial piston	
Maximum displacement	22.3 in ³ (365 cc)	
Speed @ rated engine rpm		
@ max displacement	350 rpm	
Torque @ max displacement and relief pressure	1,478 lb-ft (1090 N·m)	
Travel	High/low trigger-button control	
Low range	0 - 5.3 mph (8.5 km/h)	
High range	0 - 7.5 mph (12.0 km/h)	
Final drive	Single-reduction planetary	
Undercarriage		
Max torque @ rated rpm	5,410 lb-ft (3991 N·m)	
Track adjustment	Hydraulic	
Frame	Rigid	
Length of track on ground	64.7 in (1645 mm)	
Track rollers per side	4	
Front idler diameter	13.7 in (350 mm)	
Rear Idler diameter	11.4 in (290 mm)	
Bottom Rollers		
Outer flange diameter	7.8 in (200 mm)	
Center flange diameter	8.4 in (214 mm)	
Sprocket Teeth		
Number	17	
Width	1.8 in (46 mm)	
Track rollers and idlers sealed with dual cone face seals and permanently lubricated bushings		
Parking brakes		
Spring-applied, hydraulic release		
Engagement	Depress on/off brake button, raise seat bar, get off seat, or stop engine	

HYDRAULIC SYSTEM

Standard equipment		
Pump	Gear pump	
Displacement	1.94 in ³ /rev (32 cc)	
Pump flow @ rated engine rpm		
Total	22.1 gpm (83.9 L/min)	
Optional high flow @ rated engine rpm		
Total	37.2 gpm (140.6 L/min)	
Loader control valve		
3-spool open-center series with power beyond port		
Relief pressure	3000 psi (207 bar)	
Port relief pressures		
#1A Lower	3800 psi (262 bar)	
#1B Raise	3800 psi (262 bar)	
#2A Rollback	3800 psi (262 bar)	
#2B Dump	3100 psi (214 bar)	
Hydraulic lines		
Tubing	37° JIC Flare	
Loop hoses	SAE 100 R12	
Hydraulic oil cooler		
Core type	Two row in-line	
Hydraulic filter		
6-micron spin-on replaceable element on the return line with warning indicator		

INSTRUMENTATION

Battery Voltage
LCD hourmeter
Fuel level LED bar graph
Warning lights
Fuel level
Engine preheat
Engine coolant temperature
Engine oil pressure
Air cleaner restriction
Hydraulic charge pressure
Hydraulic filter restriction
Hydraulic oil temperature
Parking brake
Seat belt reminder
Warning alarms
Engine coolant temperature
Engine oil pressure
Hydraulic oil temperature
Hydraulic charge pressure
Seat belt reminder

ELECTRICAL SYSTEM

Alternator	95 amp
Starter	2.7 kW
Battery	
12-volt low-maintenance 850 cold-cranking amps @ 0° F (-18 C)	

OPERATOR ENVIRONMENT

No-tool tilt ROPS/FOPS canopy w/side screens
Water-shedding vinyl seat
Seat presence switch
2 in (51 mm) retractable seat belt
Restraint bar w/integral armrests
Two adjustable, hands-only control levers
Hand and foot throttles
Loader control lockout system
Rear window w/escape provision
Front and rear halogen floodlights
Floor cleanout panel

CYLINDERS

Lift cylinder	
Bore diameter	2.25 in (57 mm)
Rod diameter	1.75 in (44.4 mm)
Stroke	38.2 in (970 mm)
Closed length	52.0 in (1.32 m)
Bucket cylinder	
Bore diameter	2.5 in (63.5 mm)
Rod diameter	1.5 in (38.1 mm)
Stroke	20.9 in (530 mm)
Closed length	47.4 in (1.2 m)

OPERATING WEIGHTS



Unit equipped with 17.7 in (450 mm) track, 84 in (2.08 m) dirt bucket, mechanical attachment coupler, full fuel	10,915 lb (4951 kg)
Add-on weights	
Side cab glass	+70 lb (32 kg)
Lexan® door	+70 lb (32 kg)
Glass door w/wiper	+77 lb (935 kg)
Heater	+60 lb (27 kg)
Suspension seat	+10 lb (4.5 kg)
High flow auxiliary hydraulics	269 lb (122 kg)
Hydraulic attachment coupler	+38 lb (17 kg)

SERVICE CAPACITIES

Fuel tank	20.7 gal (78.3 L)
Engine oil w/filter	3.2 gal (12 L)
Engine cooling system	18 qt (17 L)
Flywheel/splitter gearbox	2.1 qt (2 L)
Hydraulic system	
Reservoir	6.5 gal (24.5 L)
Total	17.0 gal (64.3 L)

TRACK SELECTION

	Area in ² (cm ²)	Ground Pressure psi (kPa)	Width to Outside of Track in (mm)
17.7 in (450 mm)	2,293 (13 776)	4.8 (33.1)	82.6 (2098)
15.7 in (400 mm)	2,038 (13 120)	5.4 (37.2)	80.6 (2047)

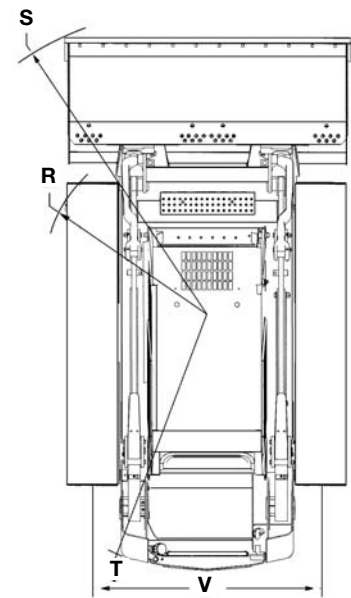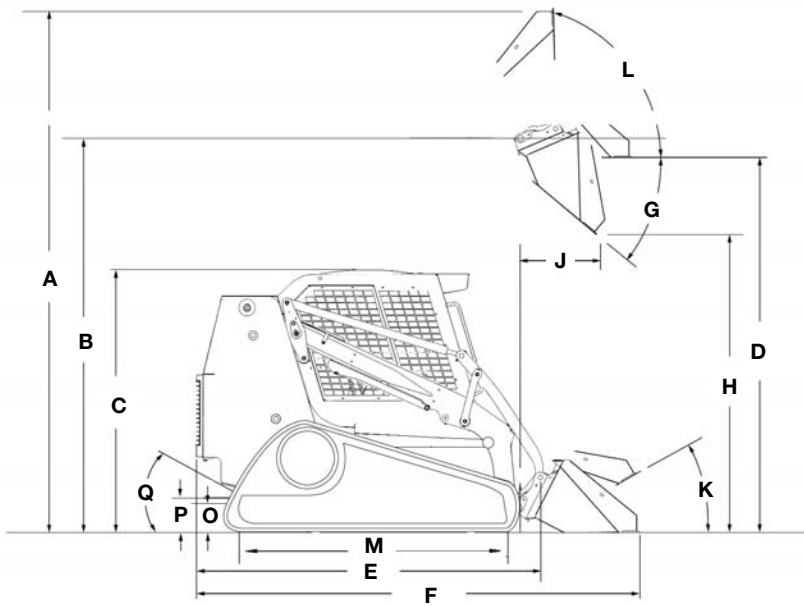

DIMENSIONS

A.	Overall operating height	
	Dirt bucket	150.3 in (3.82 m)
	Light material bucket	158.9 in (4.04 m)
	Height to*	
B.	Bucket hinge pin	124.5 in (3.16 m)
C.	Top of rollover protective structure	80 in (2.03 m)
D.	Bottom of level bucket, loader arm fully raised	116.5 in (2.96 m)
	Overall length	
E.	w/o attachment w/coupler	108.7 in (2.77 m)
F.	w/dirt bucket on ground	140.8 in (3.59 m)
F.	w/light material bucket on ground	148.5 in (3.79 m)
G.	Dump angle at maximum height	
	Dirt bucket	40°
	Light material bucket	35°
H.	Dump height – loader arm fully raised	
	Dirt bucket	94.5 in (2.40 m)
	Light material bucket	93.0 in (2.36 m)
J.	Reach – loader arm fully raised	
	Dirt bucket	26.7 in (678 mm)
	Light material bucket	35.3 in (896 mm)
	Maximum attachment rollback	
K.	Bucket on ground	30°
L.	Bucket at full height	55°
M.	Track on ground	64.7 in (1645 mm)
	Ground clearance	
O.	Bottom of outer frame	9.1 in (231 mm)
P.	Bottom of belly pan	11 in (279 mm)
Q.	Angle of departure	28°
	Clearance circle front	
R.	less bucket	54.5 in (1.38 m)
S.	w/84 in (2.08 m) dirt bucket on ground	86.3 in (2.19 m)
S.	w/84 in (2.08 m) light material bucket on ground	93.3 in (2.37 m)
T.	Clearance circle rear	62.2 in (1.58 m)
V.	Track gauge, centerline to centerline	65.4 in (1661 mm)

NOTE: *Equipped with 17.7 in (450 mm) track.

PERFORMANCE SPECS

Operating load	
35%	2,700 lb (1225 kg)
50%	3,858 lb (1750 kg)
Tipping load	
	7,714 lb (3499 kg)
Breakout force	
Lift	5,290 lbf (23 531 N)
Bucket	6,200 lbf (27 578 N)
Dig depth	
w/bucket flat	0.24 in (6 mm)
Cycle time	
Raise	3.14 seconds
Lower	2.44 seconds
Dump	1.14 seconds
Rollback	.99 seconds

NOTE: SAE rated lift capacities. Cycle time measured with rated load in bucket.

OPTIONAL BUCKETS

Type	Width in (m)	Weight lb (kg)	Heaped Capacity ft ³ (m ³)
Dirt	84 (2.1)	593 (269)	19 (.54)
HD Dirt	84 (2.1)	676 (307)	19 (.54)
Utility	84 (2.1)	674 (306)	25.3 (.72)
HD Utility	84 (2.1)	758 (344)	25.3 (.72)
Light Material	84 (2.1)	584 (265)	32.5 (.92)

STANDARD EQUIPMENT

OPERATOR'S COMPARTMENT

ROPS/FOPS canopy w/side screens
No-tools tilt ROPS/FOPS
Instrument panels
Water-shedding vinyl seat
2 in (51 mm) retractable seat belt
Hand & foot throttles
Ergonomic hand controls
Seat bar w/integral arm rests
Loader control lockout system
Electric brake control
Rear window w/emergency escape feature
Floor cleanout panel

LOADER

Radial lift linkage
Mechanical two-way self-leveling linkage
Power Cycle bucket linkage
Mechanical attachment coupler

ENGINE

Case Family III 445T/M2 diesel
Tier II Certified
Integral engine oil cooling
Fuel filter w/water trap
Dual element air cleaner
95 amp alternator
850 CCA 12-volt battery
Heavy-duty radiator

POWERTRAIN

Hydrostatic
Servo controls
SAHR disc parking brakes
2 speed

HYDRAULICS

Auxiliary hydraulics 3000 psi
(207 bar) - 22.1 gpm (83.9 L/min),
Auxiliary interlock system
Loader arm mounted ISO flat face hydraulic quick connectors
Loader function lockout system
Loader lift lockout override
3-spool loader control valve
Heavy-duty oil cooler
Loader arm float position

OTHER

Integral bumper counterweight
Lockable service access hood
Single-point daily servicing
Halogen lights, 2-front, 1-rear
Rear tail lights
Options harness

OPTIONAL EQUIPMENT

OPERATOR'S COMPARTMENT

Vinyl suspension seat w/ 2 in (51 mm) retractable seat belt
Vinyl suspension seat w/ 3 in (76 mm) retractable seat belt
Electric auxiliary hydraulic control
Glass front door w/wiper & washer
Sliding side windows
Air conditioning
Heater (deluxe)
Accessory power outlet
Floor mat w/footrests
Headliner

LOADER

Auxiliary front electric control
Ride Control
Hydraulic attachment coupler

HYDRAULICS

Auxiliary high-flow 3000 psi
(207 bar) - 37.2 gpm (140.6 L/min)
Attachment case drain plumbing
Electronically controlled auxiliary hydraulics
Second auxiliary hydraulics

ENGINE

Coolant block heater
Grid heater

OTHER

Backup alarm and horn package
Rotating beacon
Lift hooks
Drawbar
Heavy-duty rear door
Special paint
Language decals
Factory installed tires - see page 2
Buckets - see page 3
Bolt-on spill guards
Bolt-on cutting edges
42 in (1.07 m)/48 in (1.22 m) pallet forks
Jump start terminals/battery disconnect switch

NOTE: All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.

NOTE: All engines meet current EPA emissions requirements.

IMPORTANT: CNH America LLC reserves the right to change these specifications without notice and without incurring any obligation relating to such change. CNH America LLC does not warrant the safety or reliability of attachments from other manufacturers.

Case is a registered trademark of CNH America LLC. Any trademarks referred to herein, in association with goods and/or services of companies other than CNH America LLC, are the property of those respective companies.



www.casece.com

 CASE IS A BRAND OF CNH,
A GLOBAL LEADER IN CONSTRUCTION EQUIPMENT, AGRICULTURAL EQUIPMENT AND FINANCIAL SERVICES.